



Guangxi LiuGong Machinery Co.,Ltd.
No. 1 Liutai Road, Liuzhou, Guangxi.
545007

PR China

T: +86 0772 3886124

E: overseas@liugong.com

HQ: www.liugong.com

MH: www.lgforklift.cn

Like and follow us:



LIUGONG 102018-ENG

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.

CLG2080H-100H

FORKLIFT



LIUGONG




TOUGH WORLD. TOUGH EQUIPMENT.

MAXIMIZE YOUR RETURN ON INVESTMENT

LiuGong's **customer-driven** design and **quality-focused** engineering creates lasting value that will deliver to your bottom line.

DEPENDABLE POWER

Unmatched performance driven by the World-Class Engine.

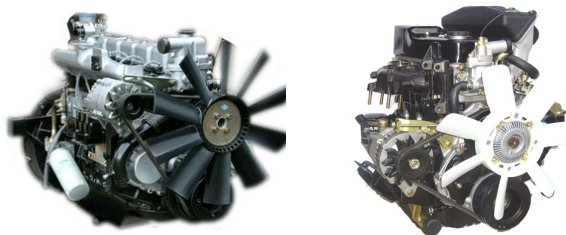

ERGONOMIC

Widen operating space and reasonable design can give the operator better experience.



COMFORTABLE

The full hydraulic steering system allows for smooth steering in an ergonomic seating posture, hence improved operator's comfort.



HIGH EFFICIENCY

Newly optimized hydraulic system provides excellent lifting speed, assisting you to finish work efficiently and safely.

GOOD VIEW

The mast and overhead guard are designed for wider view, as well as operator's comfort and safety.



MAINTAINING

The engine hood and rear hood with big angle for easy to maintain.



PARTS

Using genuine LiuGong parts is key to keeping your costs low and your machine in top working order. Our extensive support network is always there when you need it, to maximize your business profitability.



AFTER SALES SERVICE

As a customer of LiuGong you can feel confident that our dealers and regional offices will be there to support you with training, service and maintenance needed throughout the life of your machine.




SPECIFICATION

General	Model	1				CLG2080H
	Power Type	2				Diesel
	Base Capacity	3	@rated load center	kg		8,000
	Load Center	4		mm		600
Weights	Service Weight	5	unloaded	kg		11,500
	Axle Load	6	loaded / unloaded, front	kg		17,800 / 5,600
		7	loaded / unloaded, rear	kg		1,700 / 5,900
Tires	Tire Type	8				Pneumatic
	Wheels	9	front / rear			4 / 2
	Wheelbase	10		mm		2,600
	Tire Size	11	front			9.00-20-14PR
		12	rear			9.00-20-14PR
Mast	Tread Width	13	front / rear			1,600 / 1,720
	Max. Fork Height	14	with std 2-stage mast	mm		3,000
	Free lift	15	with std 2-stage mast	mm		200
	Height, Upright Lowered	16	with std 2-stage mast	mm		2,851
	Height, Upright Extended	17	with std 2-stage mast	mm		4,386
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg		6° / 12°
	Carriage	19	width	mm		2,210
	Fork Spread	20	minimum / maximum	mm		410 / 2,130
	Fork Dimensions	21	T x W x L	mm		70×170×1,520
	Length to Fork Face	22	with std 2-stage mast	mm		4,050
Chassis	Overall Width	23		mm		2,210
	Overhead Guard Height	24		mm		2,620
	Turning Radius	25	minimum outside	mm		3,780
	Fork Overhang	26	with std 2-stage mast	mm		710
	Right Angle Stack	27	add load length and clearance	mm		3,440
		28	minimum loaded	mm		246
	Ground Clearance	29	center of wheelbase	mm		300
	Travel Speed	30	loaded / unloaded	km/h	26 / 28	26 / 28 23 / 25
	Lift Speed	31	loaded / unloaded	m/s	0.36 / 0.43	0.36 / 0.43 0.41 / 0.44
Performance	Lower Speed	32	loaded / unloaded	m/s	0.5 / 0.4	0.5 / 0.4
	Max. Drawbar Pull	33	loaded	kg	6,000	5,600 6,000
	Max. Gradeability	34	loaded / unloaded	%	30 / 28	30 / 28 30 / 28
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech Hand / Mech
		37	manufacturer		Yuchai	Cummins Isuzu
	Engine	38	model		YC4A125	QSF3.8 A-6BG1QC-02
		39	emission compliance		CHN Stage III	CHN Stage III, Eu Stage III EU Stage I
		40	cylinders		4	4 6
		41	displacement	liters	4.84	3.76 6.49
		42	rated power	kW/rpm	92 / 2,200	86 / 2,200 82.4 / 2,000
		43	Max. torque	N · m/rpm	480 / 1,400-1,800	470 / 1,100-1,700 416.8 / 1,500

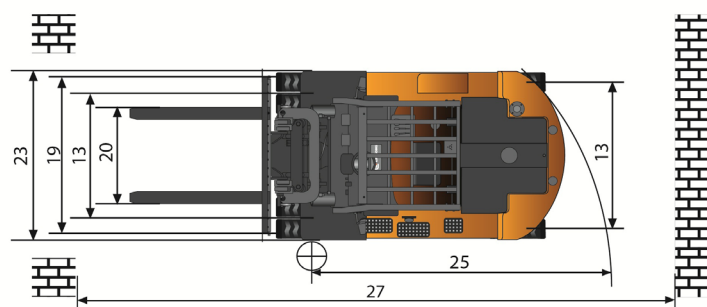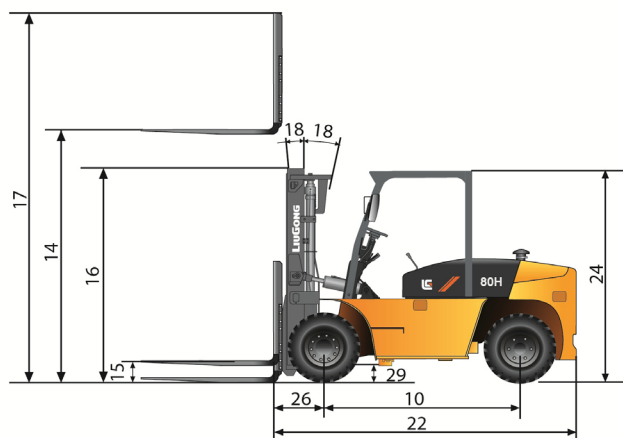

Technical drawing of a Linde 100H forklift showing dimensions in inches. The drawing includes the following measurements:

- Overall height: 17
- Height to top of mast: 14
- Height to top of load: 16
- Height to top of mast (when lowered): 15
- Height to top of mast (when raised): 18
- Height to top of mast (when lowered): 18
- Height to top of mast (when raised): 24
- Height to top of mast (when lowered): 26
- Height to top of mast (when raised): 29
- Height to top of mast (when lowered): 10
- Height to top of mast (when raised): 22

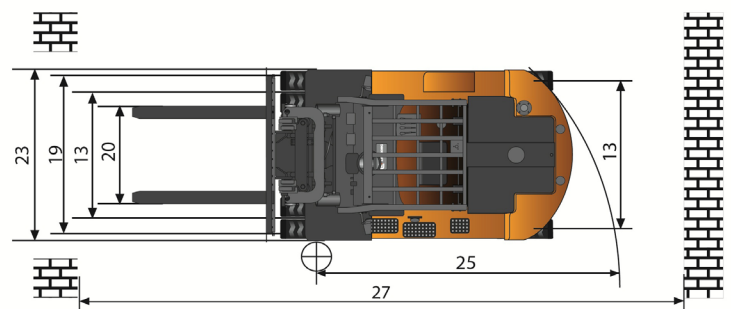


CAPACITY

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest	Mast Tilt Angle (F/B)	Rated Load Capacity		Total Weight with Standard Forks	
					With Standard Forks			
						2080H	2100H	2080H
	mm	mm	mm	degree	kg @ (600mm LC)		Kg	
Standard 2-Stage	3000	2851	200	6 / 12	8000	10000	11500	12500
	3500	3101	200	6 / 12	8000	10000	11610	12610
	4000	3401	200	6 / 12	8000	10000	11710	12710
	4500	3651	200	6 / 12	8000	10000	11800	12800
	5000	3901	200	6 / 6	7780	9450	11980	12980
	5500	4201	200	3 / 6	7430	8000	12180	13180
	6000	4451	200	3 / 6	7000	7550	12280	13280

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity		Total Weight with Standard Forks	
					With Standard Forks			
						2080H	2100H	2080H
	mm	mm	mm	degree	kg @ (600mm LC)		Kg	
Full Free 2-Stage	2851	2716	1500	6 / 12	8000	10000	11605	12605

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity		Total Weight with Standard Forks	
					With Standard Forks			
					2080H	2100H	2080H	2100H
	mm	mm	mm	degree	kg @ (600mm LC)		Kg	
	4500	2873	1492	6 / 12	7430	9340	12235	13235
	6000	3371	1990	3 / 6	6490	7960	12633	13633

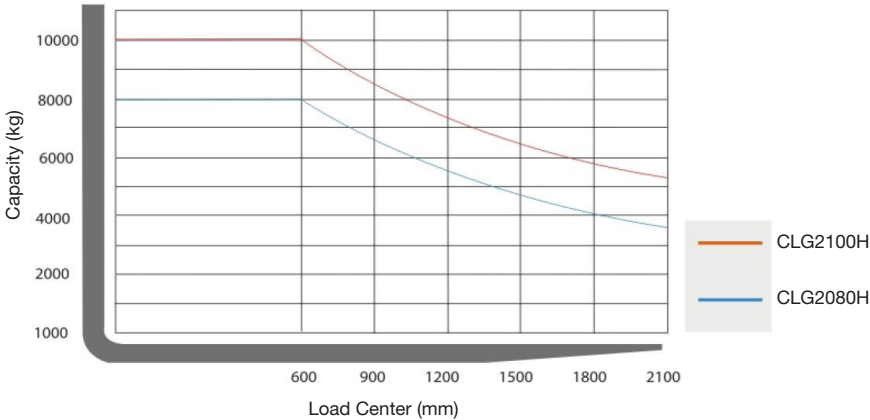

Note:

Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork,.The base point of the standard load is the center point of the cubic with the same 1200mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

STANDARD CONFIGURATION

POWER SYSTEM

- Yuchai 4A125 diesel engine
- Two-speed automatic transmission
- High strength drive axle
- Heavy duty steering axle
- Elevated air pre-cleaner
- Fuel system pre-filter
- Radiator
- Vertical exhaust

HYDRAULIC SYSTEM

- 2-function hydraulic valve
- Hydrostatic steering
- Oil filter for intake and return

ELECTRIC SYSTEM

- 2 batteries
- Front flood lights
- Front steering lights
- Rear combination lights
- Rear working lights
- Buzzer for back off

UNDERCARRIAGE

- High strength frame
- 1 piece counterweight
- Tow pin
- Air filled pneumatic drive tires
- Air filled pneumatic steer tires

MAST

- 3.0M Standard 2-stage mast
- 2210mm Wide shaft type carriage
- Load backrest
- 1520mm long shaft type pallet forks

OPERATOR STATION

- Overhead guard
- Locks for engine hood
- Vinyl cushion seat with seat belt
- Ignition lock
- Display with alarms, fuel rate, water temperature, working hour
- Tilt steering column
- Inching, brake and accelerator pedals
- Hand parking
- Floor mat

OPTIONAL CONFIGURATION

POWER SYSTEM

- Isuzu A-6BG1QC-02 diesel engine
- 2nd refined air filter
- Middle exhaust

HYDRAULIC SYSTEM

- 3-function hydraulic valve
- 4-function hydraulic valve
- Hydraulic oil radiator

ELECTRIC SYSTEM

- Amber warning light
- License plate light

UNDERCARRIAGE

- Solid pneumatic drive tires
- Solid pneumatic steer tires

MAST

- Full free 2-stage mast
- Full free 3-stage mast
- Longer shaft type pallet forks

OPERATION STATION

- Enclosed cabin
- Heater for cabin
- Operator fan
- Fire extinguisher
- Anti-corrosion lifting and tilting cylinder
- Protective cover for tilt cylinder
- Master key
- Hydraulic electronic shifting
- Half-suspension vinyl seat(tiancheng)
- Grammer full-suspension vinyl seat