



## HD 7/15 G EASY!

For maximum mobility and best cleaning results even under tough conditions: the HD 7/15 G petrol-driven cold water high-pressure cleaner with 150 bar pressure from the Gasoline Advanced range.



### 1 Maximum independence

### 2 Optimum ease of use



## HD 7/15 G EASY!

■ Robust, powder-coated tubular frame

### Technical data

Order No.	1.187-903.0
EAN code	4054278210544
Operating pressure	bar / MPa 150 / 15
Flow rate	l/h 650
Max. feed temperature	°C max. 60
Engine type	GX 160/Petrol
Power rating	kW / hp 4 / 5,5
Weight	kg 35
Dimensions (L x W x H)	mm 800 x 620 x 1105

### Equipment

Trigger gun	EASY!Force Advanced
High-pressure hose	m 10 / ID 6, 250 bar
High-pressure hose	■
Spray lance	mm 840
Anti-twist system	-
Electric starter	-
Servo Control	-

■ Included in delivery.

# ACCESSORIES FOR HD 7/15 G EASY!

1.187-903.0

KÄRCHER



		Order No.	ID	Max. working pressure	Length		Price	Description
<b>Standard with unions on both sides</b>								
High-pressure hose, 10 m DN 8, AVS trigger gun connector	1	6.110-031.0	ID 8	315 bar	10 m			10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. ▲
High-pressure hose, 15 m DN 8, AVS trigger gun connector	2	6.110-030.0	ID 8	315 bar	15 m			15 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. ▲
High-pressure hose, 20 m DN 8, AVS trigger gun connector	3	6.110-032.0	ID 8	315 bar	20 m			20 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 8/155°C/315 bar. ▲
High-pressure hose, 30 m DN 8, including rotary coupling	4	6.110-014.0	ID 8	315 bar	30 m			With rotary coupling, 2 x M 22 x 1.5 ▲
High-pressure hose, 15 m DN 10, 220 bar, extension	5	6.110-042.0	ID 10	220 bar	15 m			15 m high-pressure hose M 22 x 1.5) with kink protection and threaded couplings at both ends. Further data: DN 10/155°C/220 bar. ▲
High-pressure hose, 20 m DN 10, 220 bar, extension	6	6.110-043.0	ID 10	220 bar	20 m			with union on both sides, M 22 x 1.5 with anti-kink protection. NW 10/155°C/220 bar ▲
High-pressure hose, 25 m DN 10, extension, not rotatable	7	6.110-044.0	ID 10	220 bar	25 m			▲
Hose assembly premium DN12 21MPa 15m	8	6.110-059.0	ID 12	250 bar	15 m			High-pressure hose for water volumes greater than 1,800 l / h. With union on both sides. 2x M 22 x 1.5 with anti-kink protection. ▲
Hose assembly premium DN12 21MPa 40m	9	6.110-060.0	ID 12	250 bar	40 m			▲
High-pressure hose, 10 m DN 6, AVS trigger gun connector	10	6.110-034.0	ID 6	250 bar	10 m			10 m high-pressure hose (M 22 x 1.5) with kink protection. With patented rotating AVS trigger gun connector and manual coupling. Further data: DN 6/155°C/250 bar. □
	11	6.110-035.0	ID 6	250 bar	10 m			
<b>Longlife 400 with unions on both sides</b>								
High-pressure hose Longlife 400, 30 m ID 8, including rotary coupling	12	6.110-023.0	ID 8	400 bar	30 m			With rotary coupling, 2 x M 22 x 1.5 ▲
High-pressure hose Longlife 400, 20 m, ID 8, extension	13	6.110-027.0	ID 8	400 bar	20 m			with rotary coupling, 2 x M 22 x 1.5 ▲
High-pressure hose Longlife 400, 15 m, ID 8, including rotary coupling	14	6.110-029.0	ID 8	400 bar	15 m			With rotary coupling, 2 x M 22 x 1.5 ▲
High-pressure hose 1.5 m, ID 8, including connectors	15	6.110-024.0	ID 8	400 bar	1,5 m			1.5 m high-pressure hose (DN 8, M 22 x 1.5) with kink protection and connectors at both ends. For connecting to hose reels with appropriate connector (M 22 x 1.5). □
	16	6.110-069.0	ID 8	400 bar	1,5 m			
High-pressure hose packaged	17	6.110-038.0	ID 8	400 bar	10 m			□
<b>Longlife food industry version with unions on both sides</b>								
High pressure hose food ID 8 / 10 m	18	6.110-053.0	ID 8	400 bar	10 m			Longlife HP hose for use in the food industry. Außen-decke## animal-grease-resistant, non-colour-bleeding material. With rotary coupling, 2 x M 22 x 1,5 ▲
<b>Special hoses</b>								
High-pressure hose 1.5 m, ID 8, including connectors, outlet bend	19	6.110-068.0	ID 8	400 bar	1,5 m			□

■ Included in delivery. □ Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Flow rate				Price	Description	
<b>Trigger guns</b>									
Extended easy press trigger gun	1	4.118-005.0						Extended easy press high-pressure trigger gun for high-pressure hoses with rotating connector.	<input checked="" type="checkbox"/>
<b>Quick connect</b>									
Quick-fitting pipe union coupler trapezo	2	2.115-000.0							<input type="checkbox"/>
Quick-fitting pipe union plug nipple tra	3	2.115-001.0							<input type="checkbox"/>

Included in delivery.  Available accessories.  Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Nozzle size			Price	Description	
<b>Power nozzle spray angle 25°</b>								
Power nozzle spray angle 25°	1	2.113-006.0	38				Fan jet nozzle with 25° spray angle, suitable for large areas and removing stubborn dirt and stains.	<input checked="" type="checkbox"/>
Nozzle chemical TR for replacement 25250	2	2.113-020.0	250					<input checked="" type="checkbox"/>
<b>HP nozzle spray angle 0°</b>								
High-pressure nozzle spray angle 0°	3	2.113-001.0	40				High-pressure nozzle with powerful jet for extremely stubborn dirt.	<input type="checkbox"/>
<b>Power nozzle spray angle 15°</b>								
Power nozzle 15038 - nur fuer Ersatz	4	2.113-044.0	38					<input type="checkbox"/>
<b>Power nozzle spray angle 40°</b>								
Power nozzle spray angle 40°	5	2.113-003.0	40				Power nozzle with a 40° spray angle and fan jet, suitable for large areas and sensitive surfaces.	<input type="checkbox"/>

■ Included in delivery.  Available accessories.  Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

1.187-903.0

KÄRCHER



		Order No.	Max. working pressure	Length			Price	Description	
<b>Rotating spray lances</b>									
Lance 850 mm, rotatable, ergonomic	1	4.112-006.0	300 bar	840 mm				850 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input checked="" type="checkbox"/>
Lance 250 mm, non-rotatable	2	4.112-027.0	300 bar	250 mm					<input type="checkbox"/>
550 mm lance, non-rotatable	3	4.112-024.0	300 bar	400 mm					<input type="checkbox"/>
Rotatable lance, 600 mm, ergonomic	4	4.112-007.0	300 bar	600 mm				600 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
1050 mm lance, rotatable, ergonomic	5	4.112-000.0	300 bar	1050 mm				1050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 1550 mm, rotatable, ergonomic	6	4.112-018.0	300 bar	1550 mm				1550 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
Lance 2050 mm, rotatable, ergonomic	7	4.112-021.0	300 bar	2050 mm				2050 mm stainless steel lance (manual coupling) with ergonomic handle for ease of use and protection. Rotatable 360° under pressure.	<input type="checkbox"/>
<b>Double lance</b>									
Double lance 960 mm	8	6.394-665.0	310 bar	960 mm				960 mm double lance for variable pressure adjustment on handle at full water flow rate. Suitable for agricultural use (e.g. stable cleaning).	<input type="checkbox"/>
<b>Angular spray lance</b>									
WC and gutter lance	9	4.112-029.0						Stainless steel lance WC and gutter with nozzle insert. Specially shaped for effective and hygienic cleaning of gutters and toilets.	<input type="checkbox"/>
<b>Flexible spray lance</b>									
Flexible lance 1050 mm	10	4.112-035.0	210 bar	1050 mm				1050 mm flexible lance with variable bend from 20° to 140°, ideal for cleaning difficult to reach areas, e.g. gutters.	<input type="checkbox"/>
<b>Telescopic spray lance</b>									
Telescopic jet pipe	11	4.112-037.0	225 bar	5400 mm					<input type="checkbox"/>
Restraint belt for telescopic jet pipe	12	6.373-987.0						Convenient strap for relief when working with the telescopic spray lance (6.394-690). The burden is optimally distributed on the body and longer periods of use are possible.	<input type="checkbox"/>
<b>Gutter cleaner</b>									
Gutter cleaning lance	13	2.112-015.0						The lance is suited for cleaning of gutter systems. Because of the shape of the lance and the special nozzle the gutter can be cleaned without removing the cover plates.	<input type="checkbox"/>
<b>Undercarriage spray lance</b>									
Underbody lance	14	4.112-032.0		700 mm				Stainless steel lance for effective and easy underbody and wheel arch cleaning. Without high-pressure nozzle.	<input type="checkbox"/>
<b>Zusatzzhandgriff</b>									
	15	4.321-380.0							<input type="checkbox"/>

■ Included in delivery.  Available accessories.  Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER




		Order No.						Price	Description	
<b>Y distributor</b>										<input type="checkbox"/>
Y distributor		1	4.111-024.0							<input type="checkbox"/>
<b>Cage frame attachment kit</b>										<input type="checkbox"/>
NOCH NICHT GEPFLEGT ----->		2	2.637-008.0							<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER

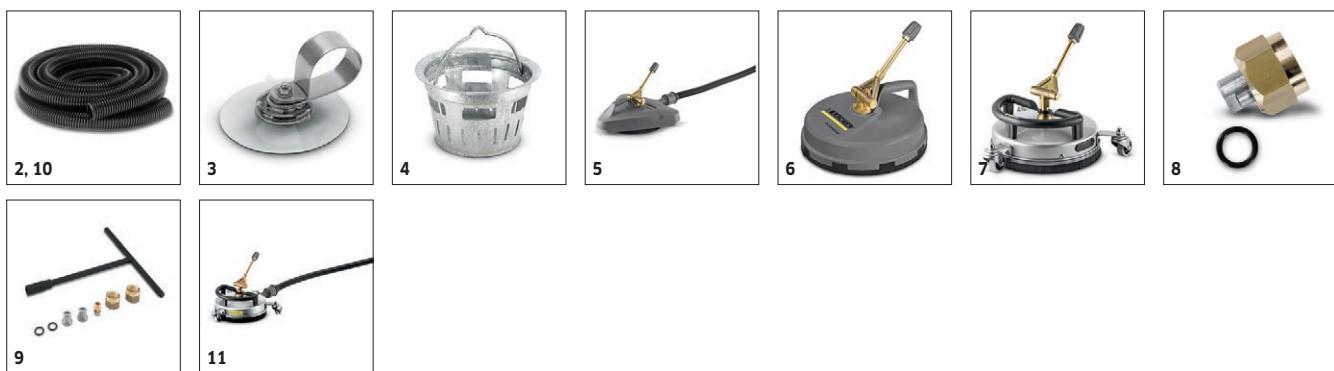

		Order No.	Flow rate	Nozzle size	Diameter	Price	Description
<b>Hard Surface Cleaner FRV 30</b>							
Add-on kit rubber lip	1	2.642-910.0					For smooth floors indoors. The squeegee increases the suction performance of the FRV 30 and minimises the amount of water remaining. This means the floor is dry in just a few minutes. <input type="checkbox"/>
Extension hose 5 m	2	4.440-939.0					5m extension hose for FRV 30. Connection sleeve included. <input type="checkbox"/>
Add-on kit hose attachment	3	2.642-528.0					<input type="checkbox"/>
Add-on kit dirt trap	4	2.642-532.0					<input type="checkbox"/>
FRV 30	5	2.111-010.0					<input type="checkbox"/>
<b>Hard surface cleaner FR 30</b>							
FR 30	6	2.111-011.0		300 mm			<input type="checkbox"/>
<b>Hard surface cleaner FR 30 ME</b>							
FR 30 ME surface cleaner	7	2.111-013.0		300 mm			Hot water resistant stainless steel surface cleaner with double ceramic bearings, non-marking swivel castors and suction hose connection. Ideal for indoor cleaning, e.g. food industry. <input type="checkbox"/>
<b>Machine-specific nozzle kit for FR</b>							
Nozzle kit for surface cleaners (type-specific) 500 - 650 l/h	8	2.640-401.0	500-650 l/h				Nozzle kit includes power nozzles and unions. For Kärcher surface cleaners (500 to 650 l/h). <input type="checkbox"/>
<b>Machine-specific nozzle kits for FRV</b>							
Nozzle kit O40 for FRV 30	9	2.642-431.0		40			<input type="checkbox"/>
<b>FRV 30 ME surface cleaner</b>							
Suction hose FRV 30 me	10	4.441-040.0					<input type="checkbox"/>
FRV 30 ME	11	2.111-012.0					<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

1.187-903.0

KÄRCHER



		Order No.					Price	Description	
<b>Nozzle union</b>									
Protection part TR only for replacement	1	4.112-011.0							<input type="checkbox"/>
<b>Coupling parts</b>									
	2	6.987-705.0							<input type="checkbox"/>
<b>Rotary coupling</b>									
Rotary coupling	3	4.111-021.0						Kärcher rotary coupling prevents twisting and kinking of high-pressure hoses for ease of use. Connector M 22 x 1.5 mm. With grip protection.	<input type="checkbox"/>
<b>Coupling</b>									
Coupler -2xM22x1,5	4	4.111-037.0						Brass double connector for connecting and extending high-pressure hoses. With rubber protection. Connector: 2x M 22 x 1.5 m.	<input type="checkbox"/>
<b>Connector</b>									
Nozzle connector/screw connector	5	4.111-022.0						Nozzle connector/screw connector for connecting high-pressure nozzles and accessories to the high-pressure trigger gun (with nozzle connector). Connectors: 1x M 22 x 1.5 and 1x M 18 x 1.5.	<input type="checkbox"/>
	6	4.111-038.0							<input type="checkbox"/>
<b>Adapter EASY!Lock</b>									
Adapter 1 M22AG-TR22AG	7	4.111-029.0							<input type="checkbox"/>
Adapter 2 M22IG-TR22AG	8	4.111-030.0							<input type="checkbox"/>
Adapter 3 M22IG-TR22AG	9	4.111-031.0							<input type="checkbox"/>
Adapter M22 - Swivel	10	4.111-032.0						M22 x 1.5 female and swivel connection. For extension of high-pressure hoses with AVS connection or for usage of the telescopic lance with a high-pressure hose with AVS connection.	<input type="checkbox"/>
Adapter 5 TR22IG-M22AG	11	4.111-033.0							<input type="checkbox"/>
Adapter 6 TR22IG-M22AG	12	4.111-034.0							<input type="checkbox"/>
Adapter 7 M18IG-TR20AG	13	4.111-035.0							<input type="checkbox"/>
Adapter 8 TR20IG-M18AG	14	4.111-036.0							<input type="checkbox"/>
<b>HP detergent injector</b>									
Detergent injector for high and low pressure (without nozzles)	15	4.637-032.0						Detergent injector for independent high and low pressure dosage. Maximum dosage about 15%.	<input type="checkbox"/>
Detergent injector for high pressure	16	4.637-033.0						Cleaning agent dosage at high pressure 3 - 5 %	<input type="checkbox"/>
<b>Machine-specific nozzle kit with order no. 3.637-170</b>									
Machine-specific nozzle kit with order no. 3.637-170.0 HD 500-700 l/h	17	4.769-045.0						For HD 500 - 700 l/h. Consists of nozzle insert + HP power nozzle + union	<input type="checkbox"/>
<b>Nozzle insert with order no. 3.637-001</b>									
Nozzle insert for Order No. 3.637-001, high-pressure for machines up to 1100 l/h.	18	4.769-003.0						Nozzle insert for detergent injector 3.637-001 for high-pressure detergent application. For high-pressure cleaners with a water flow rate up to 1100 l/h.	<input type="checkbox"/>
Low pressure for units rated up to 1100 l/h	19	4.769-001.0						For low pressure with machines up to 1.100 l/h	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Max. working pressure	Nozzle size			Price	Description	
<b>Triple nozzles</b>									
Triple nozzle 038	1	4.117-032.0	300 bar	38				Triple nozzle with manual nozzle changeover. Convenient spray adjustment. For high-pressure cleaners with injector: low-pressure fan jet for detergent removal and application. Connector M 18x1.5.	<input type="checkbox"/>
<b>Dirt Blaster, small</b>									
Dirt blaster 04	2	4.114-020.0	180 bar	40					<input type="checkbox"/>
<b>Dirt blaster, large</b>									
Dirt blaster 04	3	4.114-041.0	300 bar	40				The dirt blaster with rotating pencil jet offers 10 times better cleaning performance. Ceramic nozzle and bearing ring for a long service life. Further data: Max. 300 bar, 30 MPa, 85°C.	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Nozzle size			Price	Description	
<b>Wet blasting attachment (without nozzle)</b>								
Wet blasting attachment with flow control (without nozzles)	1	4.115-000.0					Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet.	<input type="checkbox"/>
Wet blasting attachment without flow control (nozzles not included)	2	4.115-006.0					Paint, rust and scale removal made easy: Kärcher wet blasting attachment with flow control for adding blasting abrasive to the high-pressure jet. Without flow control.	<input type="checkbox"/>
<b>Nozzle pack for wet blasting attachment</b>								
Nozzle kit for wet blasting attachment 040	3	2.637-900.0	40				Nozzle kit with wet blasting nozzle and nozzle insert (type specific). For optimal Kärcher wet blasting attachment performance. Only in combination with wet blasting attachment 4.762-010/-022.	<input type="checkbox"/>
<b>Boron carbide nozzle</b>								
Boron carbide nozzle, for machines as of 1000 l/h	4	6.415-084.0	6 mm				In addition to nozzle packs. Very wear-resistant nozzle with boron carbide chuck for continuous-duty operation.	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Max. working pressure	Nozzle size	Diameter	Price	Description
<b>Pipe cleaning hose, ID 6</b>							
Hose assembly TR pipe cleaning DN6 max.2	1	6.110-046.0	250 bar				<input type="checkbox"/>
Pipe cleaning hose, DN 6, 20 m, 220 bar	2	6.110-008.0	250 bar				<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 max.2	3	6.110-047.0	250 bar				<input type="checkbox"/>
Hose assembly TR pipe cleaning DN6 14MPa	4	6.110-048.0	140 bar				<input type="checkbox"/>
Pipe cleaning hose	5	6.110-049.0	140 bar				<input type="checkbox"/>
Pipe cleaning hose, DN 6, 30 m	6	6.110-050.0	140 bar				<input type="checkbox"/>
<b>Pipe cleaning nozzle</b>							
Drain cleaning dirt blaster D 25/040	7	6.415-944.0		40	25 mm		<input type="checkbox"/>
Drain cleaning dirt blaster D 30/040	8	6.415-946.0		40	30 mm		<input type="checkbox"/>
Drain cleaning dirt blaster D 35/040	9	6.415-948.0		40	35 mm		<input type="checkbox"/>
Pipe cleaning nozzle	10	5.763-015.0		55	16 mm		<input type="checkbox"/>
	11	5.763-016.0		60	16 mm		<input type="checkbox"/>
	12	5.763-017.0		50	30 mm		<input type="checkbox"/>
Rotating pipe cleaning nozzle	13	6.415-428.0		50	16 mm		<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Flow rate			Price	Description	
<b>Cup foam lance</b>								
Packing complete for 6.394-969.0	1	2.112-018.0						<input type="checkbox"/>
Tank 1L	2	6.414-954.0						<input type="checkbox"/>
<b>Inno Foam Kit</b>								
Inno foam kit with detergent injector	3	2.112-000.0					High-pressure foam system with double lance (foam nozzle and high-pressure jet for rinsing). For use with mobile and stationary high-pressure and HDS pressure cleaners for cleaning or disinfection.	<input type="checkbox"/>
<b>Easy Foam Set</b>								
Easy Foam Set with RM injector	4	2.112-010.0					HP foam system for use with HD/HDS units for cleaning and disinfecting. Foam nozzle for connection to lance and HP chemical injector with precision 0-5% metering valve. The machine specific nozzle kit has to be ordered separately.	<input type="checkbox"/>
<b>Nozzle kits for Inno/Easy Foam Set</b>								
Nozzle Kit 060 for Inno/Easy Set 600 - 700 l/h	5	2.111-018.0	600-700 l/h				Optimal adaptation to different machine outputs for economic use.	<input type="checkbox"/>
<b>Foam nozzle mounting kit</b>								
Foam nozzle kit	6	2.112-013.0					Foaming agent kit. The foam nozzle is ideal for use in sanitary areas and the food industry and wherever long application times are necessary.	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Length			Price	Description	
<b>Hose reel add-on kit</b>								
Add-on kit hose reel	1	2.110-004.0	30 m					<input type="checkbox"/>
<b>Automatic, self-winding hose reels</b>								
Add-on kit hose reel plastics	2	6.392-074.0	20 m				Automatic hose reel for 20 m high-pressure hose. The console is made from powder-coated steel, the drum is made from plastic.	<input type="checkbox"/>
Add-on kit hose reel	3	6.392-083.0	20 m				Automatic hose reel for 20 m high-pressure hose. The console consists of stainless steel, the drum is made from plastic.	<input type="checkbox"/>
Hose reel, automatic, 20 m, painted	4	6.392-106.0	20 m				Automatic hose reel of durable plastic. Painted steel bracket. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
Add-on kit hose reel lacquered basaltgra	5	6.392-105.0	20 m					<input type="checkbox"/>
Hose reel, automatic, 20 m, stainless steel	6	6.392-076.0	20 m				Automatic stainless steel hose reel. With swivel holder. Suitable for 20 m high-pressure hose.	<input type="checkbox"/>
ABS hose reel stainless steel	7	6.392-122.0	20 m				High-grade, automatic steel hose reel. Especially suitable for use in the food industry. The material and finish provide for a corrosion-resistant, watertight capsuled sprong drive. Connection for HP hoses with nipple.	<input type="checkbox"/>
Swivel holder	8	2.639-931.0					Swivel holder for automatic hose reel wall mounting. For maximum action radius and flexibility of high-pressure hose. Rotatable 120°. Galvanised steel.	<input type="checkbox"/>
ABS wall fastening stainless steel	9	2.641-867.0					Swivelling wall bracket made of high-grade steel (for 2.641-866). This makes maximum flexibility and convenience possible when working with the HP hose.	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Flow rate			Price	Description	
<b>Push-on washing brush</b>								
Push-on wash brush, M 18 x 1.5	1	4.113-001.0					Push-on wash brush for universal use. Simply push on to lance. Connector: M 18 x 1.6.	<input type="checkbox"/>
<b>Rotating washing brush</b>								
Washing brush rotary	2	4.113-004.0	500-800 l/h					<input type="checkbox"/>
	3	4.113-003.0	500-800 l/h					<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.

# ACCESSORIES FOR HD 7/15 G EASY!

## 1.187-903.0

KÄRCHER



		Order No.	Length	Diameter		Price	Description	
<b>Geka coupling</b>								
With hose nozzle, R 1/2"	1	6.388-461.0					with hose liner	<input type="checkbox"/>
With hose nozzle, R 3/4"	2	6.388-455.0						<input type="checkbox"/>
Hose coupling	3	6.388-458.0					with female thread	<input type="checkbox"/>
<b>Suction filter</b>								
Water filter	4	6.414-956.0						<input type="checkbox"/>
Suction filter with check valve	5	4.730-012.0					Brass suction filter suitable for ponds, storage tanks, etc. With check valve.	<input type="checkbox"/>
<b>Fine-mesh water filter</b>								
Fine-mesh water filter with adapt-	6	4.730-102.0					Fine-mesh water filter, 125 µm, max. temperature 50°C. Protects the high-pressure cleaner from dirt particles con-	<input type="checkbox"/>
er							tained in the water. Water flow rate up to 1200 l/h. Connec-	<input type="checkbox"/>
<b>Water supply hose</b>								
Water supply hose	7	4.440-038.0	7,5 m				NW 13 R1" / R 3/4", up to 30 °C	<input type="checkbox"/>
<b>Backflow check valve</b>								
Backflow preventer	8	2.641-374.0					To prevent detergent getting into the drinking water cycle in case of inlet at low-pressure. - hot water resistant up to 80 °C - tested according to IEC 60335-2-79 - integrated leakage protection	<input type="checkbox"/>

■ Included in delivery.  Available accessories. ▲ Extension hose.